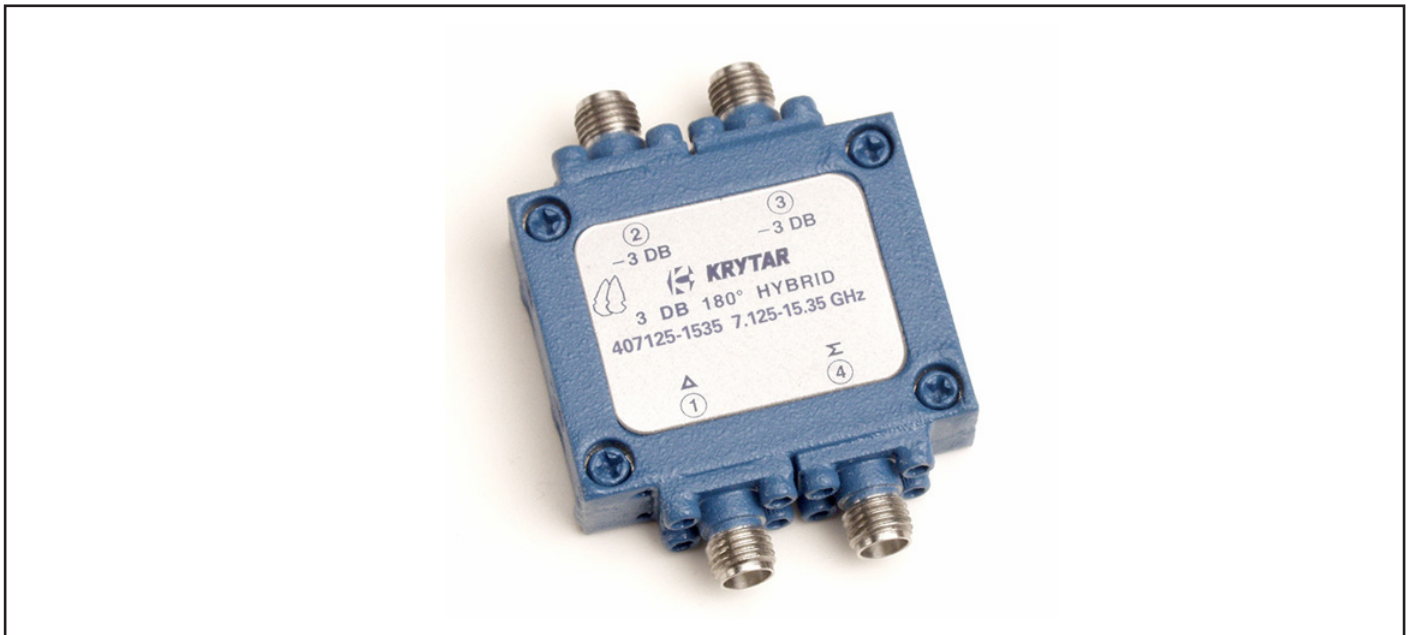



7.125-15.35 GHz 180° HYBRID COUPLER

SPECIFICATIONS

FREQUENCY RANGE	7.125-15.35 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.6 dB
PHASE IMBALANCE	± 8 Degrees
ISOLATION	> 16 dB
MAXIMUM VSWR	1.6
INSERTION LOSS	< 1.1 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	1.5
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS (INCHES)
